LG VX7000 External LCD Display Replacement

Written By: Nichole Shaw



INTRODUCTION

Sat on your phone and cracked the outer screen? Replace it.

NOTE: Replacing the outer screen requires replacing the entire outer casing.

TOOLS:


- Phillips #00 Screwdriver (1)
- iFixit Opening Tools (1)

Step 1 — External LCD Display



- Using Tweezers, remove 4 rubber screw covers.
- Remove screws located under rubber plugs using the screwdriver by turning counterclockwise.
- NOTE: Screws will not come completely out of phone.

Step 2

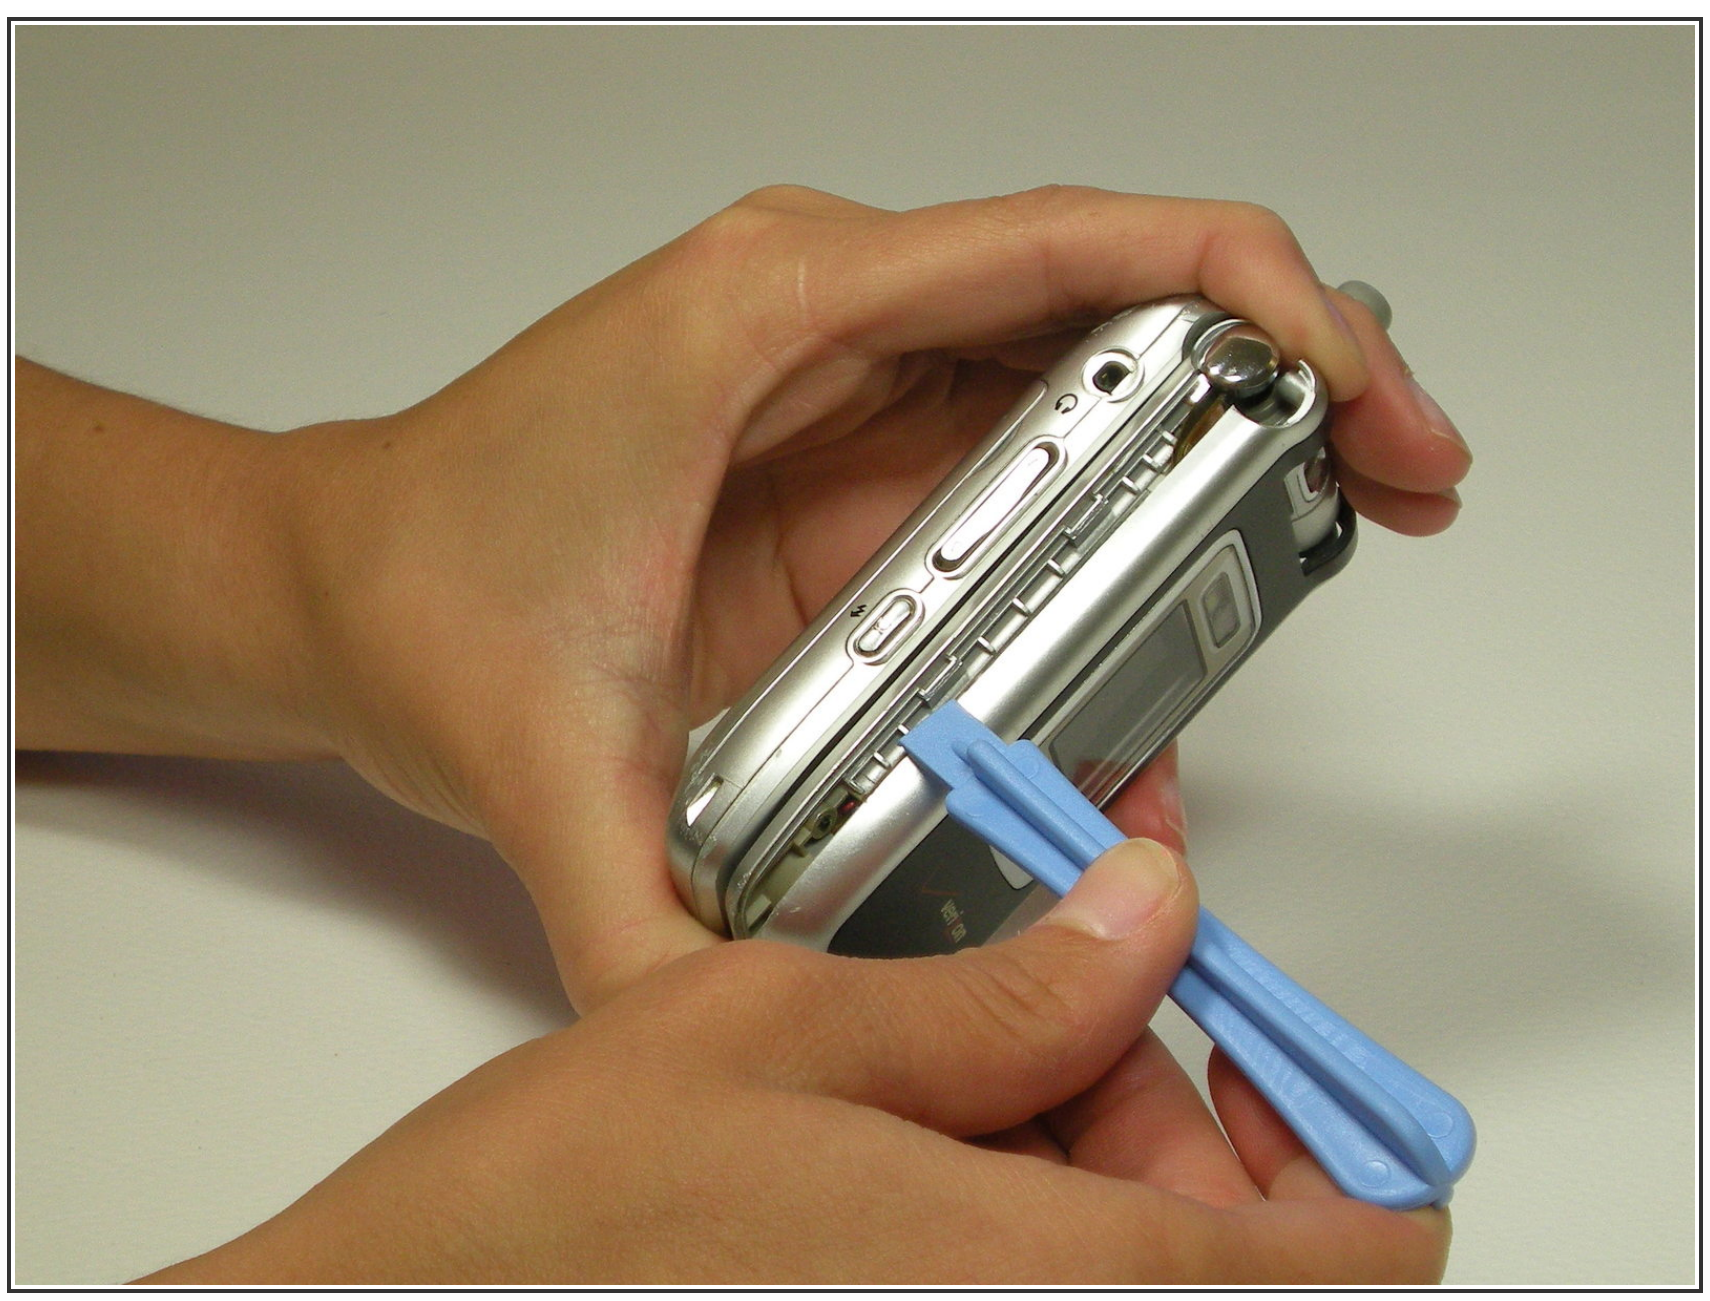

- Using the iPod Opening Tool, pry the face plate off the front of the phone.
- NOTE: There will be a significant amount of resistance to removing the face plate from the phone.
- Align new face plate where cracked face plate perviously was.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-08-04 04:17:30 PM.